





Industrial Peristaltic Pumps


RBT-100 Data sheet

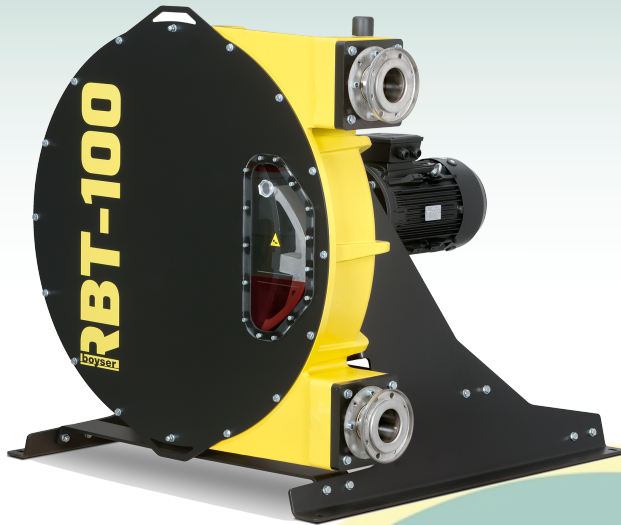


| | |
|-------------------------|------------------------------|
| Capacity: | 20 l/rev. |
| Connections: | DN-100 |
| Max. Pressure: | 15 bar |
| Rotor system: | Shoes |
| Available hoses: | NR NBR EPDM HYPALON |

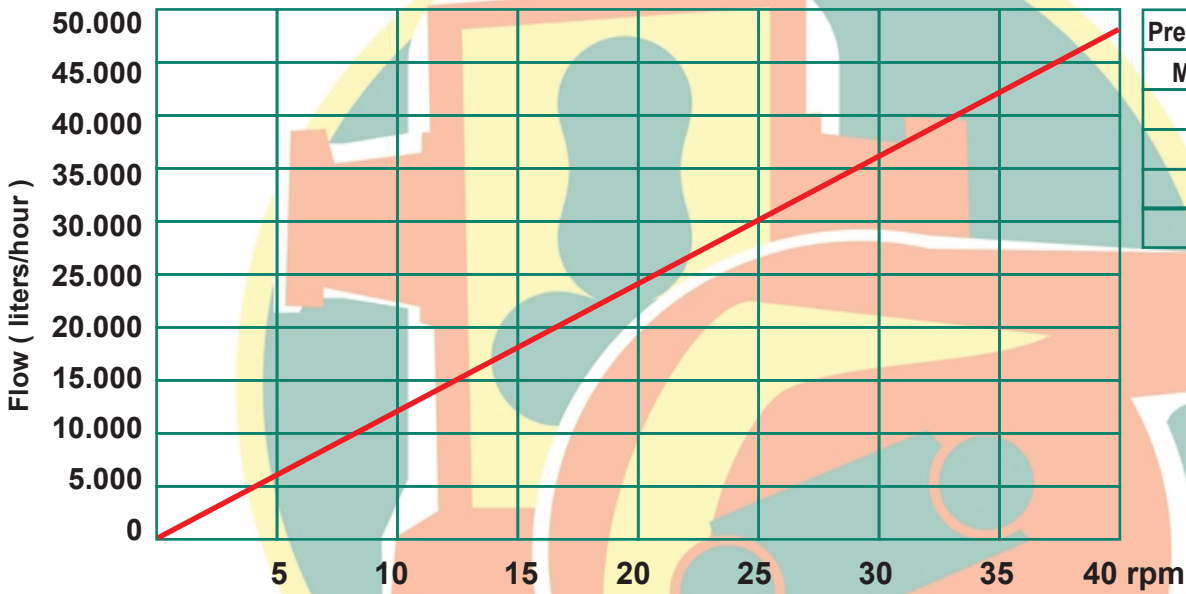

| Pressure (bar) | Torque (Nm) |
|----------------|-------------|
| Minimum | 3100 |
| 5 | 3800 |
| 7,5 | 5400 |
| 10 | 6700 |
| 15 | 8100 |

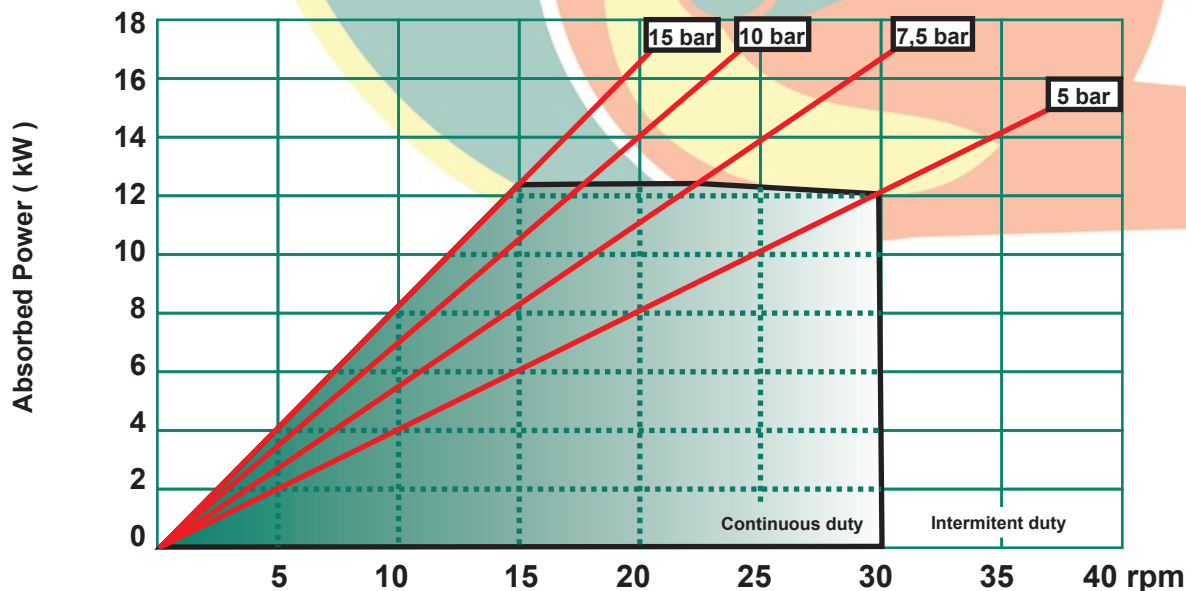

| Description | Material | Surface treatment |
|--------------|---|--|
| Pump housing | Cast Iron EN-GJL-250 | Polyester powder coated Halar coated (Optional) |
| Front cover | Steel F-111 / Methacrilate | Polyester powder coated Halar coated (Optional) |
| Rotor | Nodular Cast Iron EN-GJL-400 | Cataforesis |
| Shoes | Nodular Cast Iron EN-GJL-400 | Hardened |
| Base plate | Steel F-111 Stainless Steel AISI-304 (Optional) | Polyester powder coated -- |
| Connections | Stainless Steel AISI-304 Polypropylene (Optional) PVDF (Optional) | -- |

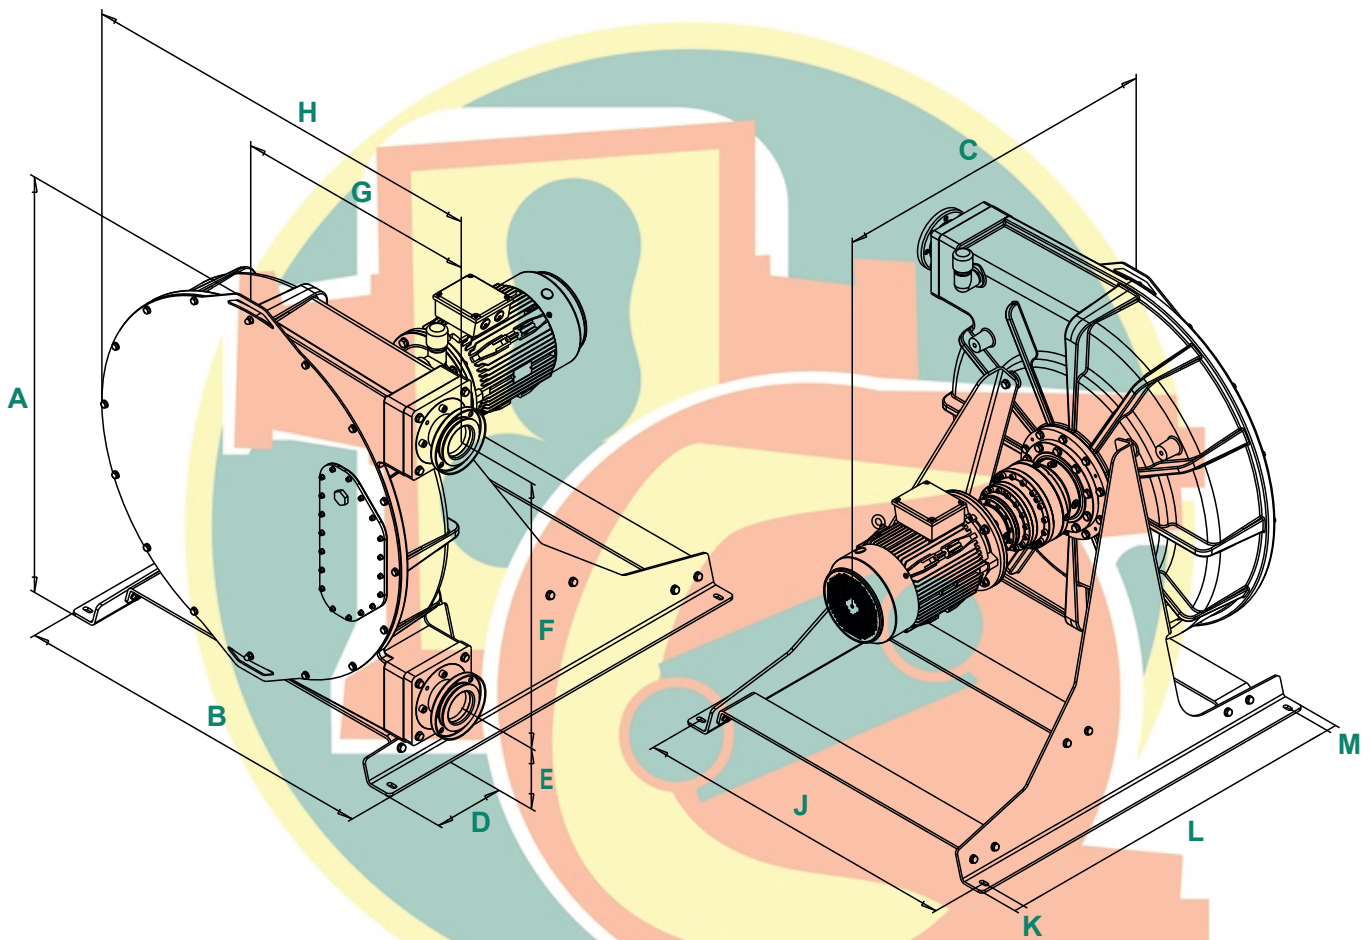

| A | B | C | D | E | F | G | H | J | K | L | M | Connections |
|------|------|---|-----|-----|------|-----|------|------|----|------|----|-------------|
| 1480 | 1383 | * | 216 | 277 | 1000 | 787 | 1434 | 1322 | 40 | 1420 | 40 | DIN DN100 |

* To confirm according type and power driver.



Bombas Boyser, S.L

c/ Miquel Martí i Pol, s/n - Pol. Ind. Pla de la Costa
08182 Sant Feliu de Codines - Barcelona - Spain

Tel. +34 93 844 77 78 info@boyser.com

www.boyser.com

